



# STRIP DOORS


From the Makers of *Goff's* The Original



## CONTROL DUST, DIRT, NOISE, HUMIDITY & TEMPERATURE

### Features:

- Extremely Durable
- Flame Retardant
- Restricts Air Movement
- Reduces Heat & Cold Air Loss
- Reduce Noise
- Easy to Install

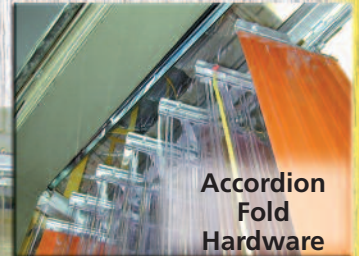

Accordion Fold Hardware



Accordion Type

### Material Available

- .060 – .160 Thick PVC
- USDA Low Temperature
- Ribbed or Non-Ribbed
- Weldview PVC Blocks UV Light

### Applications For Use

- Welding Booths
- Temperature Control
- Interior or Exterior Doors
- Room Dividers
- Loading Docks
- Noise Control

### Standard Features

- Temperature Range -20°F to 150°F
- Universal Mount Hardware Included (for Wall or Header Mount)




Weldview

### Strip Doors

Stock No.	Door Size (WxL)	Strips	Overlap Percentage
11266	3'x7'	8" x .080	50
11274	4'x7'	8" x .080	50
11303	5'x7'	8" x .080	50
11304	6'x7'	8" x .080	50
11305	7'x7'	8" x .080	50
11306	8'x7'	8" x .080	50
11307	9'x7'	8" x .080	50
11275	4'x8'	8" x .080	50
11276	5'x8'	8" x .080	50
11277	6'x8'	8" x .080	50
11295	7'x8'	8" x .080	50
11286	8'x8'	8" x .080	50
11300	9'x8'	8" x .080	50
11287	8'x8'	12" x .120	67
11289	7'x10'	12" x .120	67
11290	8'x10'	12" x .120	67
11288	9'x9'	12" x .120	67
11291	10'x10'	12" x .120	67
11293	10'x12'	12" x .120	67
11292	11'x11'	12" x .120	67
11294	12'x12'	12" x .120	67

### Options:

- Anti-Static
- USDA Material
- Wider Temperature Range
- Orange Safety Side Strips
- Mountings Other Than Wall or Header
- Ribbed




### Ribbed Material


- Ideal for Heavy Traffic Areas
- Reduces Scratching
- Ribs Spaced 2" Apart on Both Surfaces

### Universal Mounting Hardware


Whether your Strip Door needs to be flush, wall, or suspend mount, Goff's Universal Mounting Strip Door Hardware has got you covered! The 14 gauge galvanized steel construction, permanent 1/4" studs, reinforcement plates and lock nuts are all included in this "turn key" package. Holes are pre-drilled for mounting or suspension.



**Header Mount\***  
To bottom surface of overhead doorway



**Wall Mount**  
To wall surface immediately over doorway



**Threaded Rod**  
Suspended by clamp & 1/2" rod from overhead beam

\*For header mount, order strips 1-1/2" shorter to accommodate hardware.

Custom sizes are available upon request.

Traffic Type	Suggested Use	Strip Overlay	Thickness
Light (8" strips)	Interior Doors to 10'H and Exterior Doors to 8' H Interior partitions and enclosures, splash barriers, conveyor openings, assembly lines	50%	.080"
Medium (12" strips)	Interior Doors and Exterior Doors to 10' to 15' H Noise enclosures, secondary cooler doors	67%	.120"
Heavy (16" strips)	Heavy Equipment Traffic Doors 14' and Higher. Maximum noise control	50%	.160"

The above chart reflects general suggestions only. Your application, special circumstances and size of strip doors needed, may change the above suggestions.

**Sold Through Distributors Everywhere! Call To Find Your Nearest Goff's Distributor**


### Goff's Other Products



Curtain Walls



Privacy/Security Screens & Curtains



Weldview Screens



Sound Barriers



PowerRoll Vinyl Doors



Mesh, Bug Blocking Curtain Doors



Weldview Curtains



Goff's Enterprises, Inc., 1228 Hickory Street, Pewaukee, WI 53072  
e-mail: sales@goffscw.com • www.industrialcurtains.com  
Phone: (262) 691-4998 • 800-234-0337; Fax (262) 691-3255 • 800-959-0170